

Signet 2850 Conductivity/Resistivity Sensor Electronics and Integral Systems



Universal Mount



Threaded J-Box



2850 Integral Conductivity System
for in-line installations

The Signet 2850 Conductivity/Resistivity Sensor Electronics are available in various configurations for maximum installation flexibility. The universal mount version is for pipe, wall, or tank mounting and enables single or dual (digital versions only) inputs using any standard Signet conductivity / resistivity sensor. The threaded j-box version can be used with these same Signet sensors for submersible sensor mounting. It is also available as a combined integral system configuration for in-line mounting and includes a conductivity electrode in a choice of 0.01, 0.1, 1.0, 10.0 or 20.0 cm^{-1} cell constants. The 2850 is ideal for applications with a conductivity range of 0.055 to 400,000 μS or a resistivity range of 18.2 $\text{M}\Omega$ to 10 $\text{k}\Omega$.

All 2850 units are available with a choice of two outputs, digital (S³L) or 4 to 20 mA. The digital (S³L) output version allows for up to six sensor inputs directly into the Signet 8900 Multi-Parameter Controller. The two-wire 4 to 20 mA output version is available with eight 4 to 20 mA output ranges for each electrode cell constant. Each range can be inverted and is field selectable.

All 2850 units are built with NEMA 4X/IP65 enclosures which allow output wiring connections with long cable runs of up to 1,000 feet (305 m). EasyCal is a standard feature that automatically recognizes conductivity test solution values for simple field calibration. A certification tool is available for validation of the sensor electronics according to USP requirements.

Features

- Integral mount systems for quick and easy installation
- Compact design for maximum installation flexibility
- Digital (S³L) interface or two-wire 4 to 20 mA output
- EasyCal with automatic test solution recognition
- Dual channel unit available for low cost installation with Signet 8900 Multi-Parameter Controller
- For use with ALL Signet conductivity electrodes



Applications


- Water Treatment & Water Quality Monitoring
- Reverse Osmosis
- Deionization
- Demineralizer, Regeneration & Rinse
- Scrubber, Cooling tower and Boiler Protection
- Aquatic Animal Life Support Systems

Specifications


General			
Compatible Electrodes	All Signet sensors		
Materials			
Threaded J-Box for Integral Mount	PBT		
Universal/Remote Mount	PBT, CPVC		
EasyCal - Automatic recognition of the following conductivity values			
	146.93 μ S, 1408.8 μ S, 12856 μ S (@25 °C) (Test solutions Per ASTM D1125-95)		
	10 μ S, 100 μ S, 200 μ S, 500 μ S, 1000 μ S, 5000 μ S, 10,000 μ S, 50,000 μ S, 100,000 μ S (@ 25 °C) (Standard test solutions)		
Electrical			
Power	12 to 24 VDC \pm 10%, regulated for 4 to 20 mA output (typically called "Loop Powered") 5 to 6.5 VDC \pm 5% regulated recommended (provided by the Signet 8900), 3.0 mA max for Digital (S ³ L) output (Reverse polarity and short circuit protected)		
Digital (S ³ L) Output: Serial ASCII, TTL level 9600 bps			
Accuracy	Conductivity	\pm 2% of reading	
	Temperature	< 0.2 °C	
Resolution	Conductivity	0.1% of reading	
	Temperature	< 0.2 °C	
Update Rate	Single channel models	< 600 ms	
	Dual channel models	< 1200 ms	
Available data via Digital (S ³ L) Output			
	Raw conductivity		
	Calibrated conductivity		
	Calibrated temperature-compensated conductivity		
	Temperature		
Max. Temperature/Pressure Rating			
Operating Temperature	-10 °C to 85 °C	14 °F to 185 °F	
Storage Temperature	-20 °C to 85 °C	-4 °F to 185 °F	
Relative Humidity	0 to 95%, non-condensing		
Enclosure	NEMA 4X/IP65		
Current Output			
Field-selectable ranges			
Factory Set Span (Integral mount only)	0.01 cell (2819, 2839)	4 to 20 mA = 0 to 100 μ S	
	0.10 cell (2820, 2840)	4 to 20 mA = 0 to 1000 μ S	
	1.0 cell (2821, 2841)	4 to 20 mA = 0 to 10,000 μ S	
	10.0 cell (2822, 2842)	4 to 20 mA = 0 to 200,000 μ S	
Available only as a special order	20.0 cell (2823)	4 to 20 mA = 0 to 400,000 μ S	
Max. Loop Resistance	50 Ω @ 12 VDC		
	325 Ω @ 18 VDC		
	600 Ω @ 24 VDC		
Accuracy	\pm 2% of output span		
Resolution	7 μ A		
Update Rate	<600 ms		
Error Indication	22 mA		
Pure Water Compensation	When using 0.01-cm cell and raw conductivity value < 0.5 μ S, the 2850 auto-switches to compensate for non-linear temperature effects found in this low conductivity (high resistivity) range.		
Shipping Weight			
	Threaded J-Box	1.75 lb	0.75 kg
	Universal Mount	1.75 lb	0.75 kg
Standards and Approvals			
	CE		
	RoHS compliant		
	China RoHS		
	Manufactured under ISO 9001 for Quality and ISO 14001 for Environmental Management		

Dimensions


2850-5X Threaded J-Box



2850-6X Universal Mount Systems



2850-5X-XX Integral Mount Systems

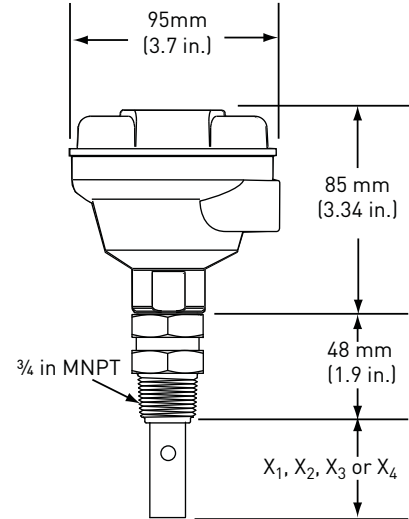


Sensor	Insertion Depth
X1 (3-2839-1)	73 mm (2.88 in.)
X2 (3-2840-1)	35 mm (1.38 in.)
X3 (3-2841-1)	41.3 mm (1.63 in.)
X4 (3-2842-1)	41.3 mm (1.63 in.)

In-Line Installation


System Overview	Panel Mount	4 to 20 mA input	Panel Mount	4 to 20 mA input
	Signet Instruments 8900 9900 	Customer Supplied Programmable Logic Controller 	Signet Instruments 8900 9900 	Customer Supplied Programmable Logic Controller
	Signet 2850 Conductivity System 		Signet 2850 Universal Mount 	
	Fittings - Customer Supplied 3/4 in. NPT or ISO threads			All sold separately

Submersible Installation


Panel Mount	Panel Mount	4 to 20 mA input	
Signet Instruments 8900 9900 	Signet Instruments 8900 9900 	Customer Supplied Programmable Logic Controller 	
Signet 2850 Universal Mount or Threaded J-Box 			
Fittings - Customer Supplied 3/4 in. NPT or ISO threads			All sold separately



-5X Threaded J-Box



-6X Universal/Remote Mount



Integral System includes the 2850 sensor electronics and a choice of Conductivity/Resistivity electrode.

Field Selectable Ranges for 4 to 20 mA Operation


The chart below indicates the field selectable ranges in which the 2850 sensor electronics can be set via internal switches. All ranges can be inverted if required. Signet Models listed below are compatible Conductivity/Resistivity electrodes.

0.01 Cell	0.10 Cell	1.0 cell	10.0 Cell	20.0 Cell
Signet Model 2819 or 2839	Signet Model 2820 or 2840	Signet Model 2821 or 2841	Signet Model 2822 or 2842	Signet Model 2823
10 to 20 MΩ	0 to 2 μS	0 to 20 μS	0 to 200 μS	0 to 400 μS
2 to 10 MΩ	0 to 5 μS	0 to 50 μS	0 to 500 μS	0 to 1,000 μS
0 to 2 MΩ	0 to 10 μS	0 to 100 μS	0 to 1,000 μS	0 to 2,000 μS
0 to 1 MΩ	0 to 50 μS	0 to 500 μS	0 to 5,000 μS	0 to 10,000 μS
0 to 5 MΩ	0 to 100 μS	0 to 1000 μS	0 to 10,000 μS	0 to 20,000 μS
0 to 10 MΩ	0 to 200 μS	0 to 2000 μS	0 to 50,000 μS	0 to 100,000 μS
N/A	0 to 500 μS	0 to 5,000 μS	0 to 100,000 μS	0 to 200,000 μS
N/A	0 to 1,000 μS	0 to 10,000 μS	0 to 200,000 μS	0 to 400,000 μS

The 4 to 20 output ranges shown in this chart can be inverted using the internal switch **Resistivity Ranges are in BOLD**

Operating Range Chart

The 2850 is capable of measuring conductivity and resistivity values over a wide range. Below is a chart of Signet Conductivity/Resistivity electrodes (listed in each range box) that is recommended for the specified measurement range.

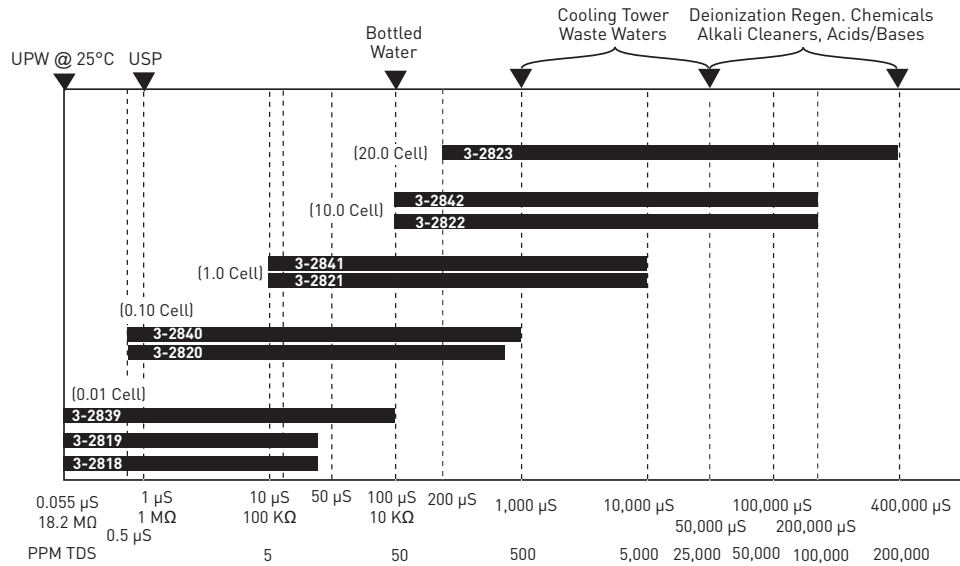

Ordering Notes

- 1) All 2850 units can be used with any Signet Conductivity/Resistivity electrode
- 2) Integral systems are only offered with Signet models 2839-2842 electrodes. 2819-2823 require a special order sensor.
- 3) Dual channel units are only available in the universal junction box/remote mount configuration and with digital (S³L) output for use with the Multi-Parameter instruments.

Application Tips

- Maximum distance between sensor and 2850 electronics is 4.6 m (15 ft).
- Longer cable runs may result in small temperature compensation offsets, but can be adjusted through calibration in the 8900. (Not available for 4 to 20 mA versions).

Please refer to **Wiring, Installation, and Accessories** sections for more information.

Ordering Information



Mfr. Part No.	Code	Sensor	Process Threaded Connection
2850 Integral Mount Systems* (includes Sensor Electronics and Electrodes)			
Digital (S ³ L) output with EasyCal			
3-2850-51-39	159 001 339	2839 Electrode, 0.01 cell	NPT threads
3-2850-51-40	159 001 340	2840 Electrode, 0.1 cell	NPT threads
3-2850-51-41	159 001 341	2841 Electrode, 1.0 cell	NPT threads
3-2850-51-42	159 001 342	2842 Electrode, 10.0 cell	NPT threads
3-2850-51-39D	159 001 343	2839 Electrode, 0.01 cell	ISO threads
3-2850-51-40D	159 001 344	2840 Electrode, 0.1 cell	ISO threads
3-2850-51-41D	159 001 345	2841 Electrode, 1.0 cell	ISO threads
3-2850-51-42D	159 001 346	2842 Electrode, 10.0 cell	ISO threads

Mfr. Part No.	Code	Sensor	Process Threaded Connection
4 to 20 mA output with EasyCal			
3-2850-52-39	159 001 347	2839 Electrode, 0.01 cell	NPT threads
3-2850-52-40	159 001 348	2840 Electrode, 0.1 cell	NPT threads
3-2850-52-41	159 001 349	2841 Electrode, 1.0 cell	NPT threads
3-2850-52-42	159 001 350	2842 Electrode, 10.0 cell	NPT threads
3-2850-52-39D	159 001 351	2839 Electrode, 0.01 cell	ISO threads
3-2850-52-40D	159 001 352	2840 Electrode, 0.1 cell	ISO threads
3-2850-52-41D	159 001 353	2841 Electrode, 1.0 cell	ISO threads
3-2850-52-42D	159 001 354	2842 Electrode, 10.0 cell	ISO threads

*For use when an integral 2850 system is desired (uses 2839-2842 series electrodes). Integral systems are shipped with a sensor and 2850 combined. Other 2850 systems are available with Signet 2819 to 2823 electrodes upon request. See individual electrode product pages for more information.

Mfr. Part No.	Code	Output
2850 Sensor Electronics**		
¾ inch threaded j-box for standpipe mounting, single input only		
3-2850-51	159 001 398	One input/one digital (S ³ L) output
3-2850-61	159 001 400	One input/one digital (S ³ L) output
Universal mount junction box for remote mount, single or dual input		
3-2850-52	159 001 399	One input/one 4 to 20 mA output
3-2850-62	159 001 401	One input/one 4 to 20 mA output
3-2850-63	159 001 402	Dual input, dual (S ³ L) output for use with 8900 only

**For use when remote sensor mounting is desired. Compatible with ALL Signet conductivity electrodes. See individual electrode product pages for more information.

Accessories and Replacement Parts

Mfr. Part No.	Code	Description
3-2850.101-1	159 001 392	Plug-in NIST traceable recertification tool, 1.0 µS simulated
3-2850.101-2	159 001 393	Plug-in NIST traceable recertification tool, 2.5 µS simulated
3-2850.101-3	159 001 394	Plug-in NIST traceable recertification tool, 10.0 µS simulated
3-2850.101-4	159 001 395	Plug-in NIST traceable recertification tool, 10.0 MΩ simulated
3-2850.101-5	159 001 396	Plug-in NIST traceable recertification tool, 18.2 MΩ simulated
3-2839-1	159 000 921	Electrode - 0.01 µS/cm, ¾ inch NPT, 4.6 m (15 ft) cable
3-2839-1D	159 000 923	Electrode - 0.01 µS/cm, ISO 7/1-R 3/4, 4.6 m (15 ft) cable
3-2840-1	159 000 786	Electrode - 0.1 µS/cm, ¾ inch NPT, 4.6 m (15 ft) cable
3-2840-1D	159 000 788	Electrode - 0.1 µS/cm, ISO 7/1-R 3/4, 4.6 m (15 ft) cable
3-2841-1	159 000 790	Electrode - 1.0 µS/cm, ¾ inch NPT, 4.6 m (15 ft) cable
3-2841-1D	159 000 792	Electrode - 1.0 µS/cm, ISO 7/1-R 3/4, 4.6 m (15 ft) cable
3-2842-1	159 000 794	Electrode - 10.0 µS/cm, ¾ inch NPT, 4.6 m (15 ft) cable
3-2842-1D	159 000 796	Electrode - 10.0 µS/cm, ISO 7/1-R 3/4, 4.6 m (15 ft) cable
5523-0322	159 000 761	Sensor cable (per ft), 3 cond. plus shield, 22 AWG

3-2850.099 Rev B (10/11)

© Georg Fischer Signet LLC

3401 Aerojet Avenue, El Monte, CA 91731-2882 U.S.A. • Tel. (626) 571-2770 • Fax (626) 573-2057 • www.gfsignet.com • e-mail: signet.ps@georgfischer.com
Specifications subject to change without notice. All rights reserved. All corporate names and trademarks stated herein are the property of their respective companies.